

# 2MP Mini Fixed Bullet Network Camera

IPC2122SR3-PF40 (60)-B



## Key Features

### Optics

- Day/night functionality
- Smart IR , up to 30 m (98 ft) IR distance
- Optical glass window with higher light transmittance
- IR anti-reflection window to increase the infrared transmittance
- 3D DNR (Digital Noise Reduction)

### Compression

- H.265, H.264, MJPEG
- Embedded smart algorithm
- Triple streams
- 9:16 corridor format

### Network

- ONVIF Conformance


### Structure

- Wide temperature range: -35°C to 60°C (-31°F to 140°F)
- Wide voltage range of  $\pm 25\%$
- IP66

## Specifications

|                            | IPC2122SR3-PF40-B  | IPC2122SR3-PF60-B                     |
|----------------------------|--|---------------------------------------|
| <b>Camera</b>              |  |                                       |
| Sensor                     | 1/2.7", 2.0 megapixel, progressive scan, CMOS  |                                       |
| Lens                       | 4.0mm@F1.8<br>Angle of view(H): 92.1°  | 6.0mm@F1.8<br>Angle of view(H): 56.7° |
| Shutter                    | Auto/Manual, 1/6~1/8000 s  |                                       |
| Min. Illumination          | Colour: 0.02 Lux (F1.8, AGC ON)<br>0 Lux with IR on  |                                       |
| Day/Night                  | IR-cut filter with auto switch (ICR)   |                                       |
| IR Range                   | Up to 30m (98 ft) IR range   |                                       |
| S/N                        | >52dB  |                                       |
| WDR                        | Digital  |                                       |
| Noise Reduction            | 2D/3D  |                                       |
| <b>Video</b>               |  |                                       |
| Max. Resolution            | 1920×1080  |                                       |
| Video Compression          | H.265, H.264, MJPEG  |                                       |
| Frame Rate                 | 1080P (1920*1080): Max. 30 fps; 720P (1280*720): Max. 30 fps; D1 (720*576): Max. 25 fps  |                                       |
| Video Streaming            | Triple   |                                       |
| 9:16 Corridor Mode         | Supported  |                                       |
| ROI                        | Supported  |                                       |
| OSD                        | Up to 8 OSDs   |                                       |
| Motion Detection           | Up to 2 areas  |                                       |
| Privacy Mask               | Up to 8 areas  |                                       |
| <b>Smart</b>               |  |                                       |
| Behavior Detection         | Intrusion, crossing line, motion detection   |                                       |
| Exception Detection        | Audio detection  |                                       |
| Intelligent Identification | Face detection   |                                       |
| Statistical Analysis       | People counting  |                                       |
| <b>Network</b>             |  |                                       |
| Protocols                  | L2TP, IPv4, IGMP, ICMP, ARP, TCP, UDP, DHCP, PPPoE, RTP, RTSP, RTCP, DNS, DDNS, NTP, FTP, UPnP, HTTP, HTTPS, SMTP, SIP, 802.1x |                                       |
| Compatible Integration     | ONVIF, API   |                                       |
| <b>Interface</b>           |  |                                       |
| Network                    | 1 RJ45 10M/100M Base-TX Ethernet   |                                       |
| <b>General</b>             |  |                                       |
| Power                      | 12 V DC, or PoE (IEEE802.3 af)   |                                       |
|                            | Power consumption: Max 6.4 W   |                                       |
| Dimensions (L × W × H)     | 157.3 × 62.4 × 63 mm (6.2" × 2.5" × 2.5")  |                                       |
| Weight                     | 0.45 kg (0.99 lb)  |                                       |
| Working Environment        | -35°C ~ +60°C (-31°F ~ 140°F), Humidity ≤ 95% RH(non-condensing)   |                                       |
| Ingress Protection         | IP66   |                                       |

## Dimensions

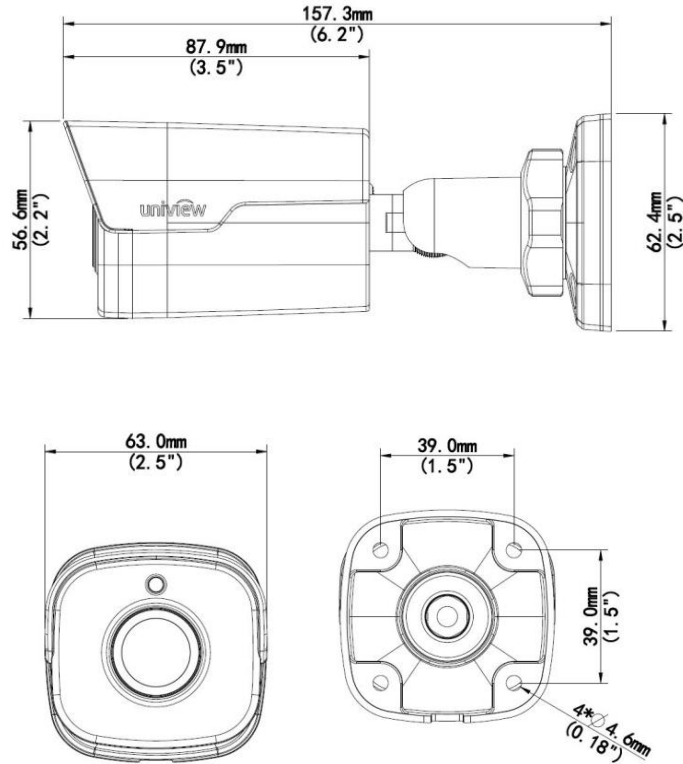

## Accessories

| Installation mode | Accessories | Description  |
|-------------------|-------------|--|
| Wall mount        | \           | Mounting pedestal is included in the Product package |
| Ceiling mount     | \           | Mounting pedestal is included in the Product package |

### Zhejiang Uniview Technologies Co., Ltd.

Building No.10, Wanlun Science Park, Jiangling Road 88, Binjiang District, Hangzhou, Zhejiang, China (310051)

Email: [overseasbusiness@uniview.com](mailto:overseasbusiness@uniview.com); [globalsupport@uniview.com](mailto:globalsupport@uniview.com)

<http://www.uniview.com>

©2016 Zhejiang Uniview Technologies Co., Ltd. All rights reserved.

\*Product specifications and availability are subject to change without notice.